


Touch KDS TK-156x/215x

15.6" / 21.5" Solid Aluminum Housing Fanless cooling and dust-proof Designed Windows Touch Panel PC




Back side of 15.6" display

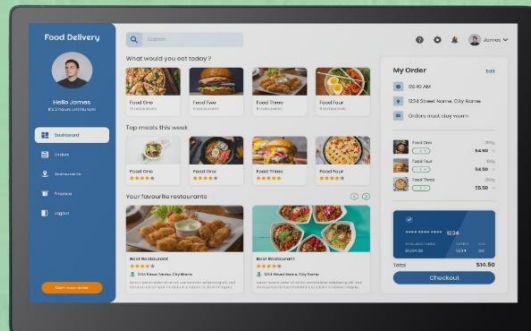

80% screen ratio for 15.6" display



Back side of 21.5" display

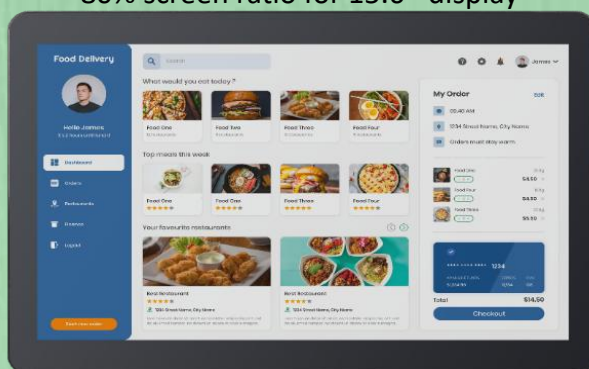

75% screen ratio for 21.5" display



• Standard VESA mount, wall-mounted design



• Supports multi-scenario software perfectly.

Specifications

Screen	15.6" IPS Touch TFT LCD (Resolution 1920 x 1080) with 10-point Capacitive Touch, 300cd/m ² 21.5" IPS Touch TFT LCD (Resolution 1920 x 1080) with 10-point Capacitive Touch, 250cd/m ² IP54 Waterproof, Oil proof, Glove Touch, Dust Prevention
CPU	Intel N5095 2.00-2.70GHz, Cache 4MB
Memory	DDR4 4GB ; Storage: SSD128GB as standard; Option: 8GB, SSD256GB
OS / Power supply	Windows 10/11/Linux ; AC 100-240V/2.5A, Output DC12V 5A
In/Out Ports	TK-156x: DC x1, USB x5, Audio x1, COM x2, Type-c x1 for 2 nd display, RJ11 x2, HDMI x1, LAN 10/100/1000Mbps TK-215x: DC x1, USB x6, Audio x1, COM x3, VGA x1, LAN 10/100/1000Mbps
Environment	Operating temperature & humidity: 0°C - 40°C, 20%~80% Storage temperature & humidity: -20°C- 60°C, 20%~85%
Dimension/Weight	TK-156x: 370.1(W) x 230.9(H) x 36.2(D) mm, Net Weight: 3.5Kg TK-215x: 527.5(W) x 330(H) x 38.5 (D) mm, Net Weight: 6.2Kg
Option	CPU: Intel Core i3, i5, MSR, WIFI, Speaker, NFC, Finger print, Camera