


Touch KDS TK-156a/215a

15.6" / 21.5" Solid Aluminum Housing Fanless cooling and dust-proof Designed Android Touch Panel PC




Back side of 15.6" display

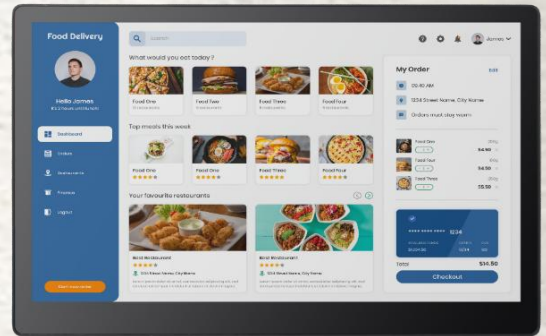

80% screen ratio for 15.6" display



Back side of 21.5" display

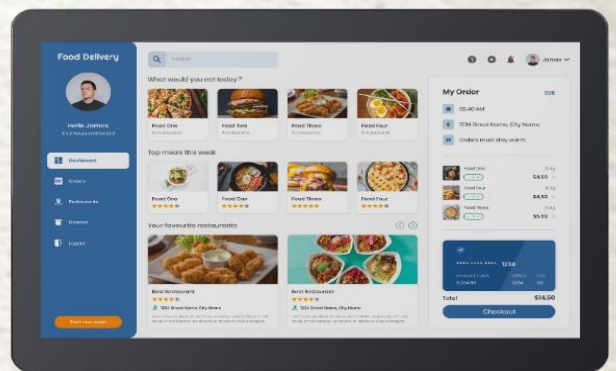

75% screen ratio for 21.5" display



• Standard VESA mount, wall-mounted design

• Supports multi-scenario software perfectly.

Specifications

Screen	15.6" IPS Touch TFT LCD (Resolution 1920 x 1080) with 10-point Capacitive Touch,300cd/m ² 21.5" IPS Touch TFT LCD (Resolution 1920 x 1080) with 10-point Capacitive Touch,250cd/m ² IP54 Waterproof, Oil proof, Glove Touch, Dust Prevention
CPU	ARM Quad-Core Cortex A55 RK3568, 2.0GHz
Memory	DDR4 4GB ; Storage: 32GB eMMC as Standard, 64GB eMMC as option
OS /Power supply	Android 11/13; AC 100-240V/2.5A, Output DC12V 5A
In/Out Ports	TK-156a:DC x1, USB x4, Audio x1,RJ11 x1, COM x1, TF x1, SIM x1,LAN 10/100/1000Mbps TK-215a:DC x1, USB x6, Audio x1,RJ11 x1, COM x2, TF x1, SIM x1,LAN 10/100/1000Mbps
Environment	Operating temperature & humidity: 0°C - 40°C, 20%~80% Storage temperature & humidity: -20°C - 60°C, 20%~85%
Dimension/Weight	TK-156a: 370.1(W) x 230.9(H) x 36.2(D) mm, Net Weight: 3.5Kg TK-215a: 527.5(W) x 330(H) x 38.5 (D) mm, Net Weight: 6.2Kg
Option	MSR, Speaker, NFC, Finger print, Camera for TK-156a